

BORELINE[®]


—FlexiRiser[®]—

FLEXIRISER

HoseSolutions Inc 

The **BORELINE**[®] Advantage

The easiest way to install submersible pumps is with **BORELINE FlexiRiser**. Designed to keep it simple, safe and efficient.

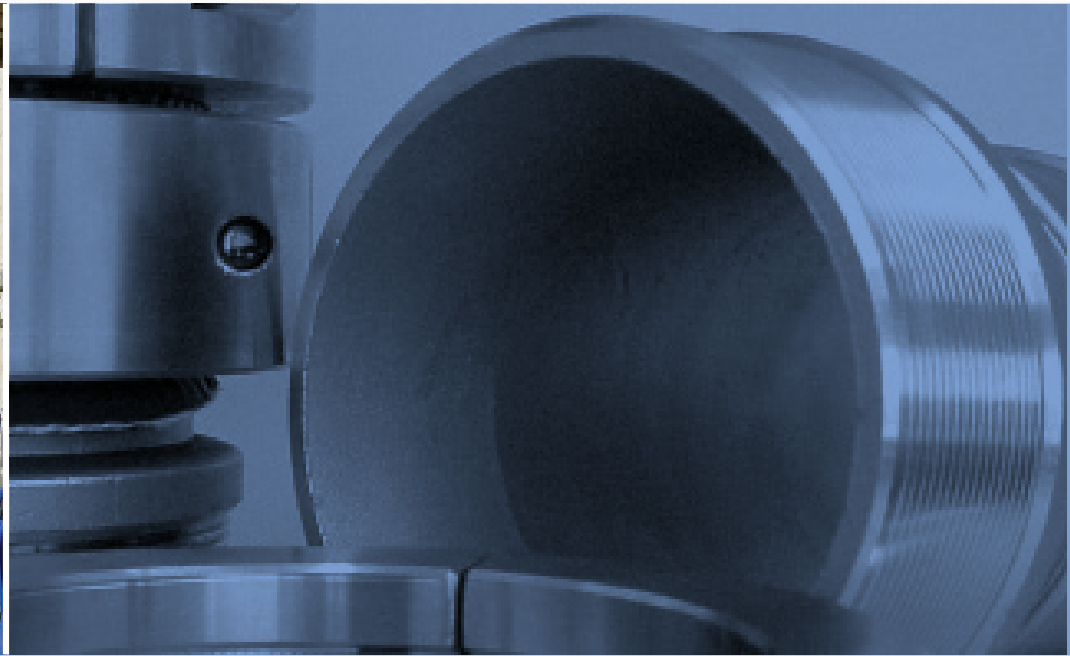

Consider the **BORELINE** advantages:

ENERGY EFFICIENT

- Lower Your Pumping Costs
- Big Energy Savings from Day One
- Self-Cleaning Means No Internal Scaling

SAFE

- Very Simple Installation and Retrieval
- Easy to Store, Handle and Transport
- Smaller Footprint at Well Site

APPROVED

- NSF 61 Approved
- ISO 9001 : 2000
- -40F (-40C) to 160F (70C)

LONG LIFE

- 50 Year Manufacturer Warranty
- Total Corrosion Resistance
- Zero Maintenance Product




Value Engineering at its Best

BORELINE FlexiRiser is used where submersible pumps are installed worldwide including North America, South America, Europe, Africa, Australia and Asia.

Install your
submersible
pump with our
FLEXIRISER
Pump Puller

Quick
Safe
Efficient

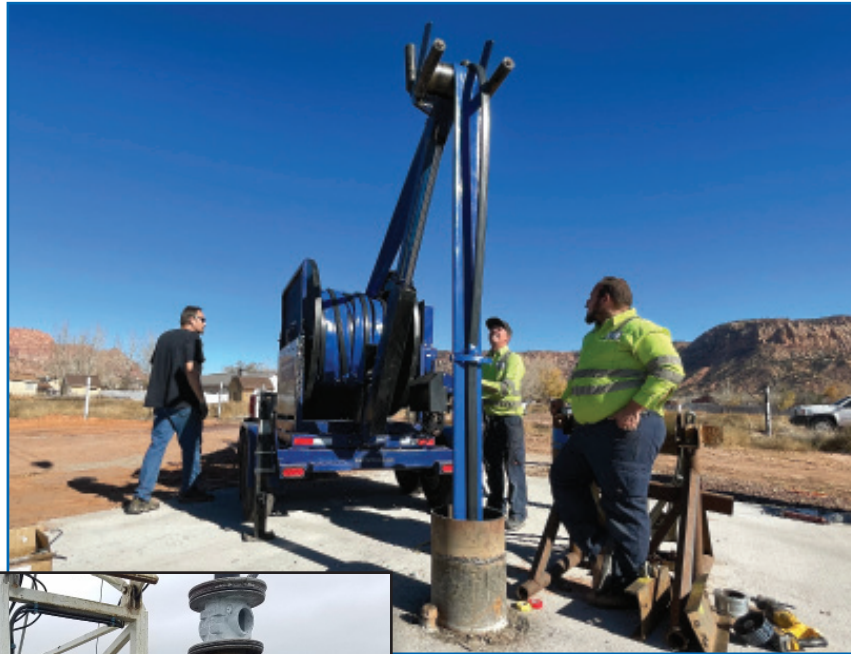

*75hp x 300gpm pump installed on
580ft x 4" **BORELINE FlexiRiser**
in 30 minutes*



Industries using
BORELINE FlexiRiser:

- MINES
- **AGRICULTURE**
- WATER UTILITIES
- **ENVIRONMENTAL**
- INDUSTRIAL
- **SOLAR**
- ASR
- **MUNICIPALITIES**



BORELINE® – It Does Make Sense

BORELINE FlexiRiser is ideal when improved efficiency and superior performance are required.



Aggressive Water Conditions – Totally Corrosion Resistant

Insist on **BORELINE FlexiRiser** when Potable Drinking Water is required for large utilities or small domestic applications.

Contaminated Sites, Environmental Clean-up

Contaminated sites require pumping in aggressive conditions resulting in the constant replacement of pumps, motors and pipe.

Pumps can be installed and retrieved without handling or contamination. This is safe and secure.



FLEXIRISER PUMP PULLER

BORELINE®

— FlexiRiser® —

Installation Procedure

STEP 1:
Connect
BORELINE
to pump



STEP 2:
Attach power
cable using
BORELINE
Cable Straps



Vertical: Use clamps to lower **BORELINE** and pump.

STEP 3 (V):
Lift pump
and lower
BORELINE
into well



Horizontal: Attach **BORELINE** to vehicle and lower into well.

STEP 3 (H):
Lift pump
and lower
BORELINE
into well



BORELINE® – Energy Savings

*Here are examples of actual customers who moved from steel pipe to **BORELINE FlexiRiser***

We were pumping 66 gpm and installed **BORELINE FlexiRiser**. Our production immediately increased to 89 gpm, that is a massive 30% increase in production.

On top of that, we are also saving \$300 per month on electricity.

This is the way to go. It is a no brainer. A no brainer at all !

BD Smith

Rural Water Community, OK

I am the superintendent of the City of Westport Water department in Washington State. We have high iron and manganese in our water which was causing us to replace our steel drop pipe every 5 to 6 years at a big cost.

We invested in **BORELINE FlexiRiser** and don't have any build-up inside our drop pipe. Most interestingly, we have increased our pumping capacity from 120 gpm to 170 gpm. This has resulted in massive energy savings for our City.

Jason Barnum

City of Westport Water Dept.



BORELINE[®] Specifications

—FlexiRiser[®]—

NOMINAL SIZE	1" 25 mm	1.25" 32 mm	1.5" 38 mm	2" 50 mm	2.5" 64 mm	3" 76 mm	3" DS 76 mm	4" 102 mm	4" DS 102 mm	5" 127 mm	6" 152 mm	8" 202 mm
MAXIMUM DEPTH SETTING	1,200 ft 400 m	1,000 ft 300 m	1,000 ft 300 m	1,000 ft 300 m	800 ft 250 m	800 ft 250 m	1312 ft 400 m	1312 ft 400 m	800 ft 250 m	700 ft 220 m	700 ft 220 m	500 ft 150 m
THEORETICAL BURST PRESSURE	980 psi 67 bar	920 psi 63 bar	920 psi 63 bar	920 psi 63 bar	850 psi 58 bar	850 psi 58 bar	1450 psi 100 bar	820 psi 56 bar	1450 psi 100 bar	820 psi 56 bar	820 psi 56 bar	600 psi 42 bar
OPERATING PRESSURE	500 psi 35 bar	430 psi 30 bar	430 psi 30 bar	430 psi 30 bar	360 psi 25 bar	360 psi 25 bar	600 psi 40 bar	360 psi 25 bar	600 psi 40 bar	310 psi 22 bar	310 psi 22 bar	200 psi 15 bar
THEORETICAL TENSILE STRENGTH	3,000 lbs 1,400 kg	3,750 lbs 1,700 kg	6,500 lbs 3,000 kg	8,750 lbs 4,000 kg	11,000 lbs 6,000 kg	15,000 lbs 7,000 kg	26,000 lbs 12,000 kg	20,000 lbs 9,000 kg	35,000 lbs 16,000 kg	30,000 lbs 13,000 kg	34,000 lbs 16,000 kg	48,000 lbs 22,000 kg
MAXIMUM* WORKING LOAD	1,500 lbs 680 kg	1,700 lbs 780 kg	2,500 lbs 1,200 kg	3,500 lbs 1,600 kg	4,500 lbs 2,000 kg	5,500 lbs 2,500 kg	9,600 lbs 4,500 kg	9,000 lbs 4,000 kg	11,400 lbs 5,200 kg	11,000 lbs 5,000 kg	15,000 lbs 6,800 kg	16,000 lbs 7,000 kg
WEIGHT OF BORELINE	0.14 lb/ft 0.2 kg/m	0.18 lb/ft 0.27 kg/m	0.22 lb/ft 0.33 kg/m	0.37 lb/ft 0.55 kg/m	0.57 lb/ft 0.85 kg/m	0.64 lb/ft 0.95 kg/m	0.90 lb/ft 1.30 kg/m	0.94 lb/ft 1.40 kg/m	1.40 lb/ft 2.00 kg/m	1.14 lb/ft 1.70 kg/m	1.68 lb/ft 2.50 kg/m	2.30 lb/ft 3.40 kg/m
FITTING BOLT TORQUE SPEC	12 ft.lb 16 Nm	12 ft.lb 16 Nm	12 ft.lb 16 Nm	20 ft.lb 27 Nm	25 ft.lb 34 Nm	33 ft.lb 45 Nm	35 ft.lb 47 Nm	33 ft.lb 45 Nm	35 ft.lb 47 Nm	40 ft.lb 54 Nm	45 ft.lb 61 Nm	45 ft.lb 61 Nm
MINIMUM* WELL DIAMETER	4" 102 mm	4" 102 mm	4" 102 mm	6" 152 mm	6" 152 mm	6" 152 mm	6" 152 mm	8" 203 mm	8" 203 mm	10" 254 mm	12" 305 mm	14" 356 mm
WEIGHT OF FITTING	2 lb 1 kg	2 lb 1 kg	5 lb 2 kg	7 lb 3 kg	11 lb 5 kg	14 lb 6 kg	19 lb 9 kg	19 lb 9 kg	24 lb 11 kg	31 lb 14 kg	35 lb 16 kg	95 lb 43 kg
WEIGHT OF WATER	0.40 lb/ft 0.6 kg/m	0.70 lb/ft 1.0 kg/m	1.4 lb/ft 2 kg/m	1.60 lb/ft 3 kg/m	2.60 lb/ft 4 kg/m	3.50 lb/ft 5 kg/m	3.50 lb/ft 5 kg/m	6.20 lb/ft 9 kg/m	3.50 lb/ft 5 kg/m	9.60 lb/ft 14 kg/m	14 lb/ft 21 kg/m	24 lb/ft 37 kg/m

***Our policy of continuous improvement can result in changes to specifications without prior notice.
This product is not for use with contaminated water without prior written approval.***

****Please contact us to discuss.***



9419 E. San Salvador Dr. #104
Scottsdale, AZ 85258 USA
+1 (480) 607-1507

Sales@HoseSolutions.com
HoseSolutions.com

HoseSolutions Inc

BORELINE®

FlexiRiser®

Supplied By:

Ref: 07/20/26